



Fixing

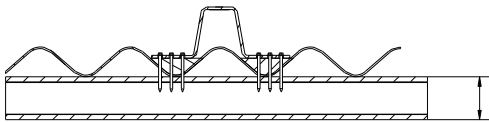

IPE 80 mini
C Beam min. thickness 2mm

- Fixing by auto-drilling screws on the metallic beam
- Fixing on beam equivalent to an IPE 80 or a C beam (Min. thickness 2mm)
- Waterproofing assured by EPDM pads

Dimensions

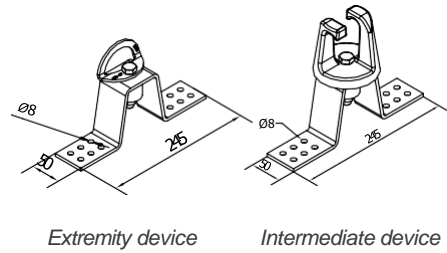

Extremity device

Intermediate device

Accessories



Option



Distant passing
of the intermediate
posts with shuttle
and adapted
intermediate
devices



Stainless
steel shuttle