



Fixing

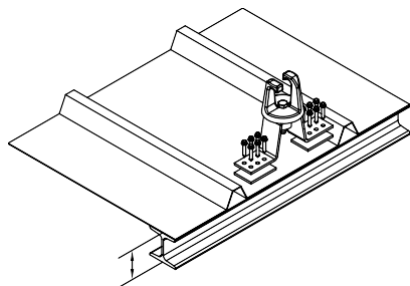


IPE 80 mini  
C Beam min. thickness 2mm

- Fixing by auto-drilling screws on the metallic beam
- Fixing on beam equivalent to an IPE 80 or a C beam (min. thickness 2mm)
- Waterproofing assured by EPDM washers and adhesive soles

Dimensions



Extremity device



Intermediate device

Accessories



Stainless steel  
Intermediate device



Stainless steel  
cable Ø8



Energy absorber



Tensor + Pre-adjustor



Device for manual  
crimping



Corner device



Distant passing  
of the intermediate  
posts with shuttle  
and adapted  
intermediate  
devices



Stainless  
steel shuttle

Option