




Fixing

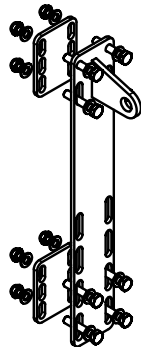

Top fixing bracket
Span between steps:
 $250\text{mm} < e < 400\text{mm}$

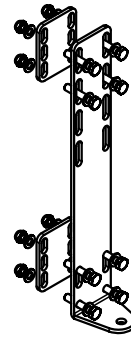

Low fixing bracket
Span between steps:
 $250\text{mm} < e < 400\text{mm}$



Galvanized steel
extension


Accessories



Cable lead



Stainless steel
cable $\varnothing 8$



Identification card



Tensor + Pre-adjustor



Device for manual
crimping

Fall arrest shuttle

